



Seamless Integration,
Effortless Efficiency

Mercury EK-1500 / EK-1600 / EK-2100 Series

15" / 15.6" / 21.5" Modular Kiosk



HIGHLIGHTS

- 15" or 15.6" or 21.5" true-flat PCAP touch screen
- Flexible configurations: floor-standing or countertop
- Modular design for easy serviceability
- A good value kiosk in entry-level category
- Popular uses: product display & advertising, ordering & payment, click & collect, ticketing & e-reservations, wayfinding & customer guidance



Windows/Android



NFC/RFID Reader



2D Scanner



Fingerprint Sensor




Status Indicator



EMV Supportive*



PRODUCT SHOWCASE / Mercury EK-1500 / EK-1600 / 2100 Series

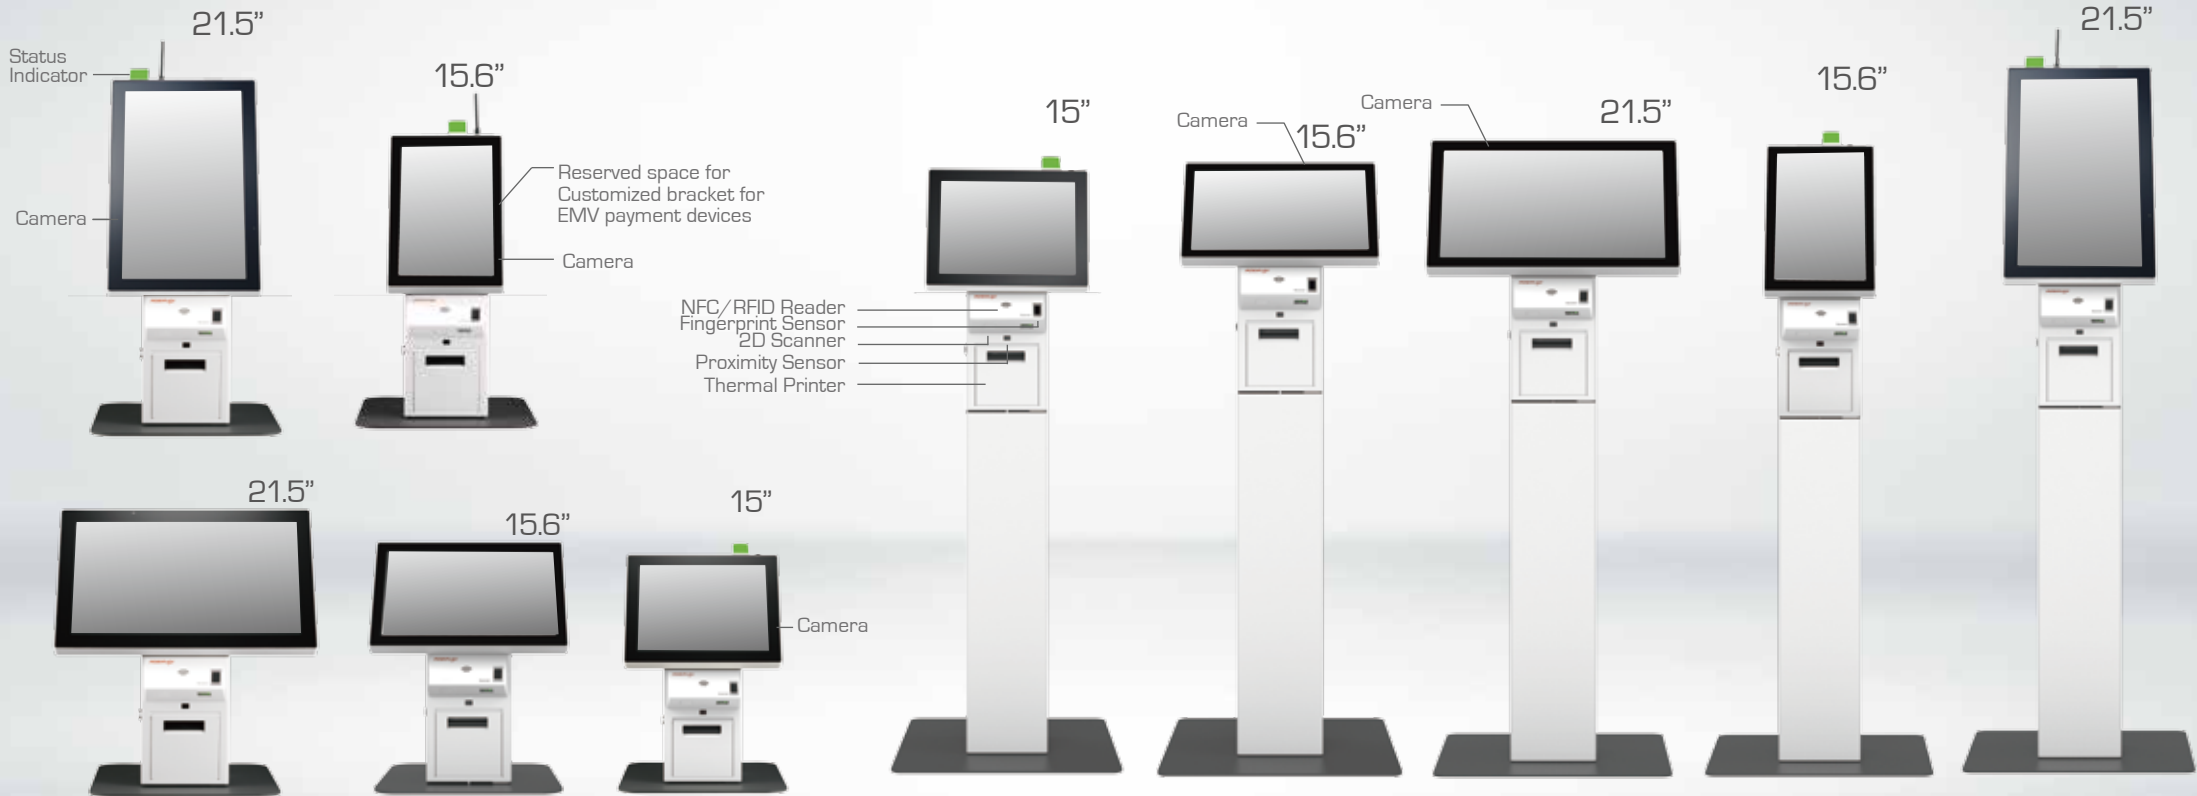

COUNTERTOP

FLOOR-STANDING

Specifications

Mercury EK-1500/EK-1600 Series

Mercury EK-2100 Series

	EK-1510/EK-1610	EK-1530/EK-1630	EK-1550/EK-1650	EK-2110	EK-2130	EK-2150
Processor	Rockchip RK3399, Dual-core Cortex A72 up to 1.8GHz + Quad-core Cortex A53 up to 1.4GHz	Intel Bay Trail J1900 Quad Core, up to 2.42 GHz, 2M Cache	Intel Kaby Lake U Core i3/i5	Rockchip RK3399, Dual-core Cortex A72 up to 1.8GHz + Quad-core Cortex A53 up to 1.4GHz	Intel Bay Trail J1900 Quad Core, up to 2.42 GHz, 2M Cache	Intel Kaby Lake U Core i3/i5
System Memory	DDR4 4 GB	DDR3L SO-DIMM slot x 1, max. 8 GB	DDR4 SO-DIMM slot x 1, max. 16 GB	DDR4 4 GB	DDR3L SO-DIMM slot x 1, max. 8 GB	DDR4 SO-DIMM slot x 1, max. 16 GB
Storage Device	32 GB eMMC + microSD slot x 1	M.2 SSD [SATA Signal Only] x 1		32 GB eMMC + microSD slot x 1	M.2 SSD [SATA Signal Only] x 1	
Intel vPro Support	N/A	N/A	Core i3: N/A Core i5: Optional	N/A	N/A	Core i3: N/A Core i5: Yes (for option)
TPM Support	N/A	Optional		N/A	Optional	
Power Supply	12V/60W x 1 + 24V/60W x 1	12V/60W x 1 + 24V/60W x 1		12V/60W x 1 + 24V/60W x 1	12V/60W x 1 + 24V/60W x 1	
OS Support	Android 9.0*/Android 10.0 with GMS	Windows 7/POSReady 7/Windows Embedded 8.1 Industry/Windows 10 IoT	Windows 10 IoT 64 bit	Android 9.0*/Android 10.0 with GMS	Windows 7/POSReady 7/Windows Embedded 8.1 Industry/Windows 10 IoT	Windows 10 IoT 64 bit
Serial Port	RJ45 x 2, 5V/12V support on all COM ports	3, DB9 x 1 + RJ45 x 2, 5V/12V support on all COM ports		RJ45 x 2, 5V/12V support on all COM ports	3, DB9 x 1 + RJ45 x 2, 5V/12V support on all COM ports	
Standard USB Port	6, USB 3.0 x 1 + USB 2.0 x 5	8, USB 3.0 x 1 + USB 2.0 x 7	8, USB 3.0 x 2 + USB 2.0 x 6	6, USB 3.0 x 1 + USB 2.0 x 5	8, USB 3.0 x 1 + USB 2.0 x 7	8, USB 3.0 x 2 + USB 2.0 x 6
OTG USB	Micro-USB x 1	N/A		Micro-USB x 1	N/A	
Display Port	HDMI x 1	HDMI x 1		HDMI x1	HDMI x1	
LAN Port	10/100 Mb x 1 10/100/1000 Mb x 1	10/100/1000 Mb x 2		10/100 Mb x 1 10/100/1000 Mb x 1	10/100/1000 Mb x 2	
Audio	Internal 3W speaker x 2	Internal 3W speaker x 2		Internal 3W speaker x 2	Internal 3W speaker x 2	
Internal Expansion Slot	N/A	M.2 x 1		N/A	M.2 x 1	
Display & Touch	LCD	15" for EK-1500 Series / 15.6" for EK-1600 Series			21.5"	
	Resolution	1024 x 768 for EK-1500 Series / 1920 x 1080 for EK-1600 Series			1920 x 1080	
	Touch	True-flat PCAP touch with multi-touch support				
Physical Dimension	Dimension (W x D x H in mm)	Countertop version (Landscape): 395 x 395 x 550 Floorstanding version (Landscape): 500 x 500 x 1325 for EK-1500 Series		Countertop version (Portrait): 395 x 395 x 774, Floorstanding version (Portrait): 500 x 500 x 1548 Countertop version (Landscape): 395 x 395 x 588, Floorstanding version (Landscape): 500 x 500 x 1362		
	Weight (N. W. in kg)	Countertop version: 18.8; Floorstanding version: 31 for EK-1500 Series		Countertop version: 22.6 Floorstanding version: 34.8		
Environmental	Operating Condition	0°C - 50°C, 20%RH - 90%RH	0°C -50°C, 20%RH - 90%RH (Equipped with SSD)		0°C - 50°C, 20%RH - 90%RH	0°C -50°C, 20%RH - 90%RH (Equipped with SSD)
	Storage Condition	-20°C - 70°C, 10%RH - 90%RH			-20°C - 70°C, 10%RH - 90%RH	
Standard Components	Proximity Sensor	1. Range from 45cm ~ 80cm (for dark color object) 2. Range from 45cm ~ 150cm (for light color object)				
	Camera	1MP wide angle camera				
	Printer	3" thermal printer w/auto cutter, 200 mm/sec (max.)				
Optional Components	Status Indicator	RGB Color LED Indicator (for EK-1600 Series portrait mode only)			RGB Color LED Indicator (for portrait mode only)	
	WiFi	USB dongle	M.2 WiFi/BT module		USB dongle	M.2 WiFi/BT module
	Scanner	2D barcode scanner				
	EMV Payment Device Bracket Support*	Custom bracket support for various EMV payment devices				
	Fingerprint Sensor	Optical type				
	NFC/RFID Reader	Support ISO/IEC 14443-A&B (MIFARE), JIS x 6319-4 (Felica), ISO/IEC 15693, NFC protocols - tag read/write (ISO/IEC-18092)				
4G/LTE Communication	N/A (for EK-1500 Series); Support selected bands & countries with full SIM slot (mini-PCIe module) by request (for EK-1600 Series)			Support selected bands & countries with full SIM slot (mini-PCIe module) by request		

*Google Play services is not supported by this device. *Designed and Manufactured in Taiwan by Posiflex Technology, Inc. *Posiflex does not sell the EMV payment devices, but can provide bracket support with an additional charge.

*The product information and specifications are subject to change without prior notice.



POSIFLEX TECHNOLOGY, INC.
 No. 23, Datong St., Tucheng Dist., New Taipei City 23679, Taiwan
 Tel.: +886-2-2268-5577 E-mail: sales@posiflex.com.tw
 Fax: +886-2-2268-5388 www.posiflex.com



EN20210505V4

Authorized Distributor / Reseller