
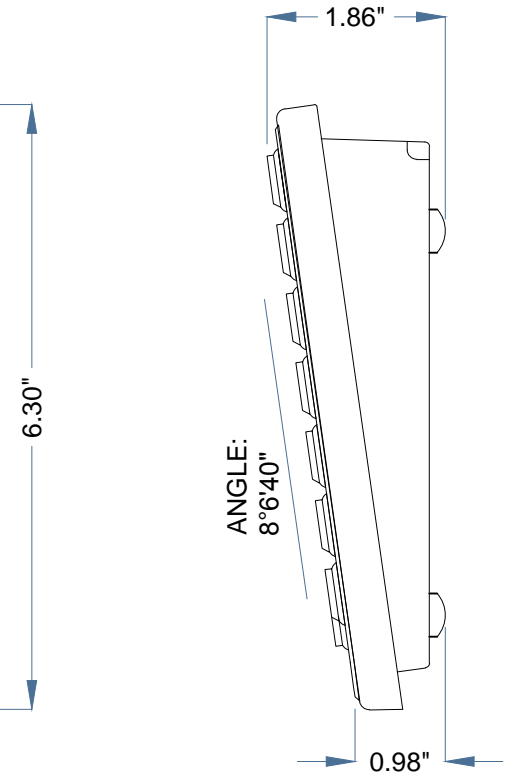
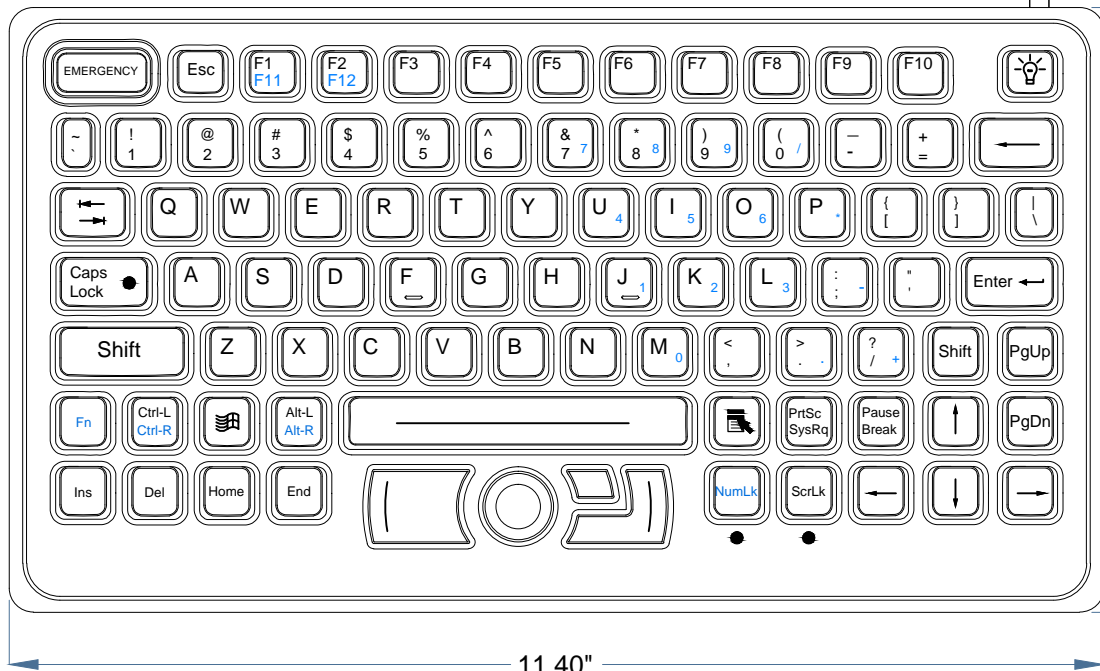


# SL-86-911-FSR

DATE	CHANGES	INTL	REV
02.13.15	Original	SCC	1.0

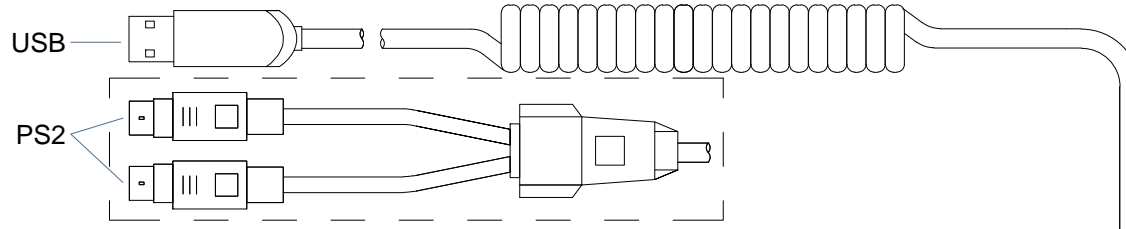

## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06 oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)  
 OPERATING: -4°F to +140°F (-20°C to +60°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2KHz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

PS2: KEYBOARD: 215mA@5V (from Keyboard port)  
 POINTER: 10mA@5V (from Mouse port)  
 USB: 215mA@5V (from USB port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754

©2015 iKey, Ltd.  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: SL-86-911-FSR

Drawing Title: SL-86-911-FSR-MKT

Drawing Number: MKT9872


Revision: 1.0

Sheet: 1 OF 2

Date: 02.13.15

SCC

# SL-86-911-FSR BACK/MOUNTING

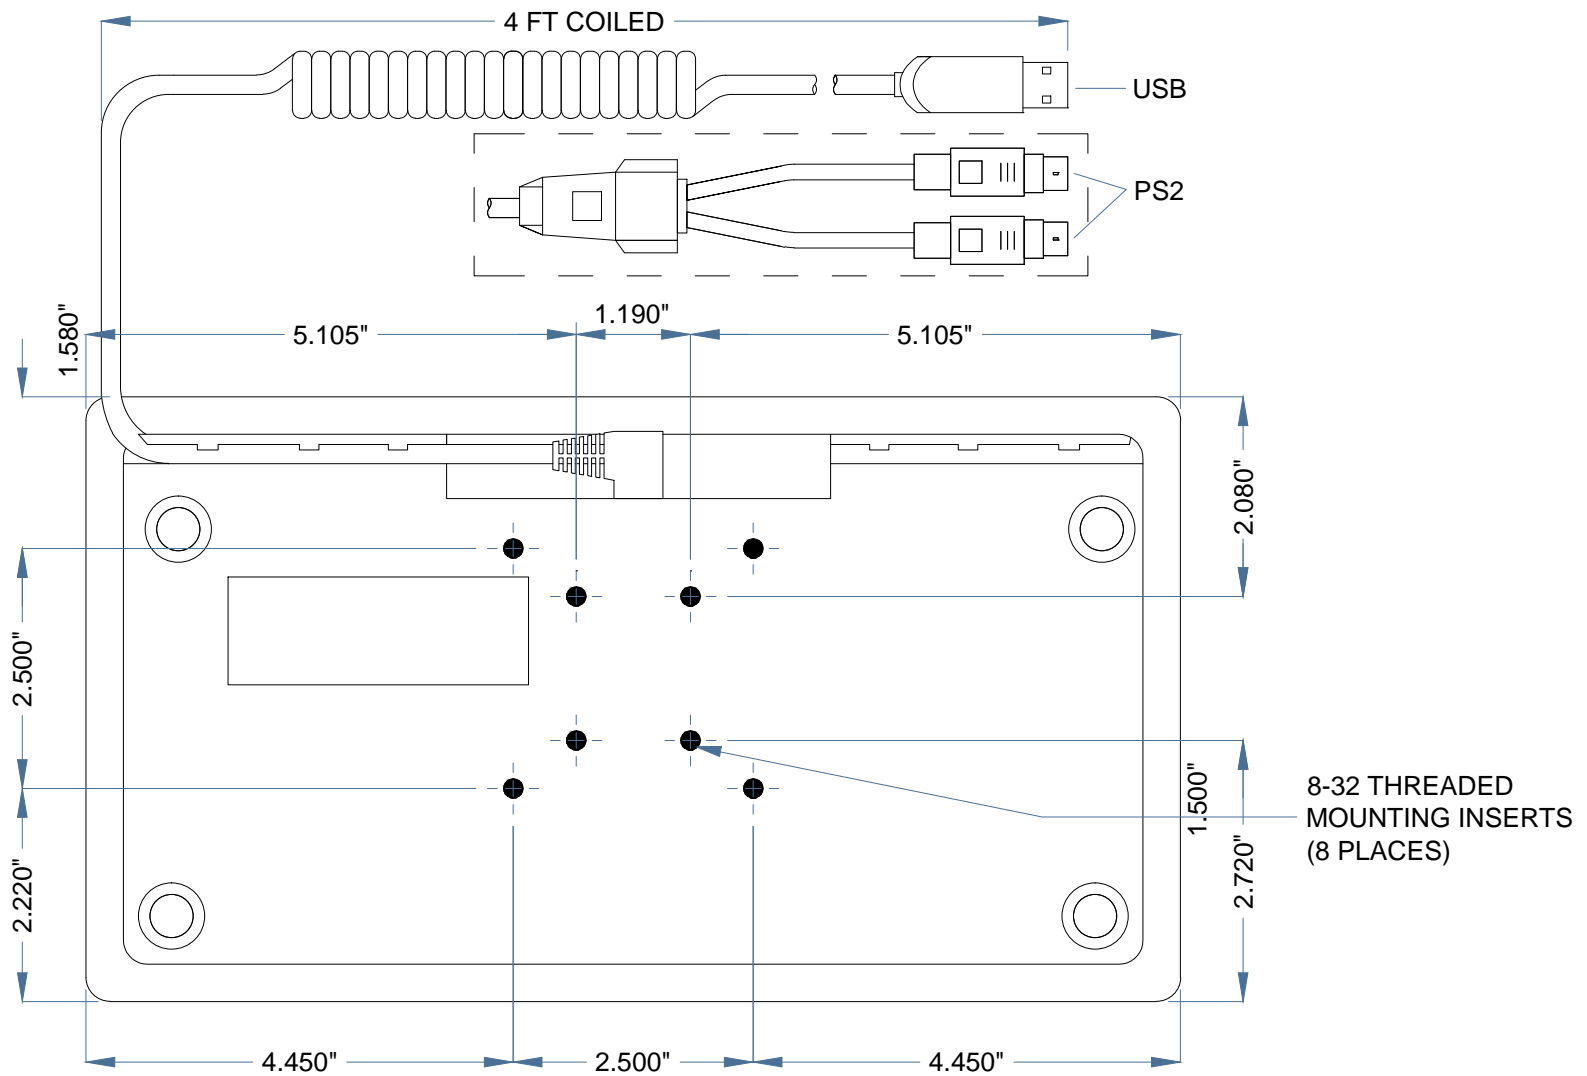

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
2621 Ridgpoint Dr. Suite 235  
Austin, Texas 78754

©2015 iKey, Ltd.  
Voice: (512) 837-0283  
Fax: (512) 927-8530

Part Number: SL-86-911-FSR

Drawing Number: MKT9872

Sheet: 2 OF 2

Drawing Title: SL-86-911-FSR-MKT

Revision: 1.0

Date: 02.13.15

SCC