



40" 4K monitor with high contrast, MVA panel and robust metal bezel

The ProLite LE4041UHS is an excellent 4K (3840 x 2160) monitor, offering a gigantic viewable area with 4 times more information and work space than a Full HD screen. Due to the high DPI (dots per inch) the monitor displays an incredibly sharp and crisp image. The VA panel technology offers exceptional colour performance, high contrast (5000:1) and wide viewing angles. The display supports PIP function, which allows users to watch images coming from different sources. The OSD can be controlled with both control buttons and an included remote control. The ProLite LE4041UHS suits a massive range of applications including public signage, retail, photographic and web design, and gaming.



4K

UHD resolution (3840x2160), better known as 4K, offers a gigantic viewable area with 4 times more information and work space than a Full HD screen. Due to the high DPI (dots per inch), it displays an incredibly sharp and crisp image.



MVA

MVA technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.

1. DISPLAY CHARACTERISTICS

DIAGONAL	39.5"; 100.3cm
PANEL	MVA LED-Backlit
DISPLAY AREA H X W	485.35 x 878.11 mm; 19.1" x 34.6"
RESPONSE TIME	4 ms
CONTRAST	5000 : 1 typical
CONTRAST	12 000 000 : 1 ACR
BRIGHTNESS	350 cd/m² typical
VIEWING ZONE	horizontal/vertical: 178° / 178°; right/left: 89° / 89°; up/down: 89° / 89°
PIXEL PITCH H X V	0.229 x 0.225 mm
NATIVE RESOLUTION	4K 3840 x 2160 (8.3 megapixel)
RESOLUTIONS	VGA (max. 1920 x1080), DVI-D (max. 3840x2160 @30Hz, max. 2560 x1440 @60Hz), HDMI (max. 3840 x 2160 @30Hz, max. 2560 x1440 @60Hz), DP v1.2 (max. 3840 x 2160 @60Hz)
HORIZONTAL SYNC	30 - 135 KHz
VERTICAL SYNC	24 - 75 Hz
SYNCHRONIZATION	Separate Sync
ASPECT RATIO	16 : 9
DISPLAY COLOURS	1,07G colours (10-bit)
PIP (PICTURE IN PICTURE)	PiP, PbP
MAX. NON-STOP OPERATING TIME	12 hours/day

2. INTERFACES & CONNECTORS

ANALOG INPUT CONNECTOR	VGA
DIGITAL INPUT CONNECTOR	DVI-D, 2xHDMI, DisplayPort
AUDIO-SIGNAL-INPUT	mini Jack
HEADPHONE CONNECTOR	Yes
OUTPUT CONNECTOR	Audio, RS232C, DP
INPUTS	RS232C

3. SPECIAL FEATURES

PLUG & PLAY	VESA DDC2B™
CONTROLS	On-Screen-Display in 10 languages (EN, FR, DE, PL, NL, CZ, IT, RU, JP, Chinese (simplified and traditional)) controlled by side controls or a remote control.
USER CONTROLS	input select, picture (picture format, contrast, brightness, sharpness, OD, ACR, ECO mode), PiP/PbP (PiP/PbP mode, sub win inputs, PiP size, PiP position, swap), audio (volume, mute, audio input), colour, language, OSD setting (OSD H. position, OSD V. position, OSD background, OSD time out, opening logo, OSD rotate, monitor ID), setup menu (auto image adjust, H. position, V. position, phase, clock, DisplayPort, blue light reducer, scheduling, memory recall, information)
SPEAKERS	2 x 6 W (Stereo)

SAFETY	CE, TÜV-Bauart, CU, VCCI-B, PSE
VESA MOUNTING	200:400 x mm
COLOUR	Black
EXTERNAL CONTROLS	yes
ORIENTATION	landscape

4. ACCESSORIES

DRIVER	Windows XP / Vista / 7 / 8
INCLUDED ACCESSORIES	2 power cables, VGA signal cable, DVI-D signal cable, HDMI cable, mDP-DP cable, RS232C cable, audio cable, remote control, quick start guide, safety guide

5. POWER MANAGEMENT

POWER SUPPLY	AC 100 - 240 V, 50 / 60 Hz
POWER SUPPLY UNIT	internal
POWER USAGE	61 W typical; max. W in Power management mode
POWER MANAGEMENT	VESA DPMS

6. EU ENERGY EFFICIENCY LABEL


ENERGY EFFICIENCY CLASS	B
ON MODE POWER CONSUMPTION	64.4W
ANNUAL ENERGY CONSUMPTION	94 kWh/annum*
VISIBLE SCREEN DIAGONAL	100 cm; 39.5"; (40" segment)

This is information under Regulation (EU) No 1062/2010.

**Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.*

7. DIMENSIONS & WEIGHT

DIMENSIONS W X H X D	921.5 x 528.5 x 69.5 mm
WEIGHT	15.6 kg

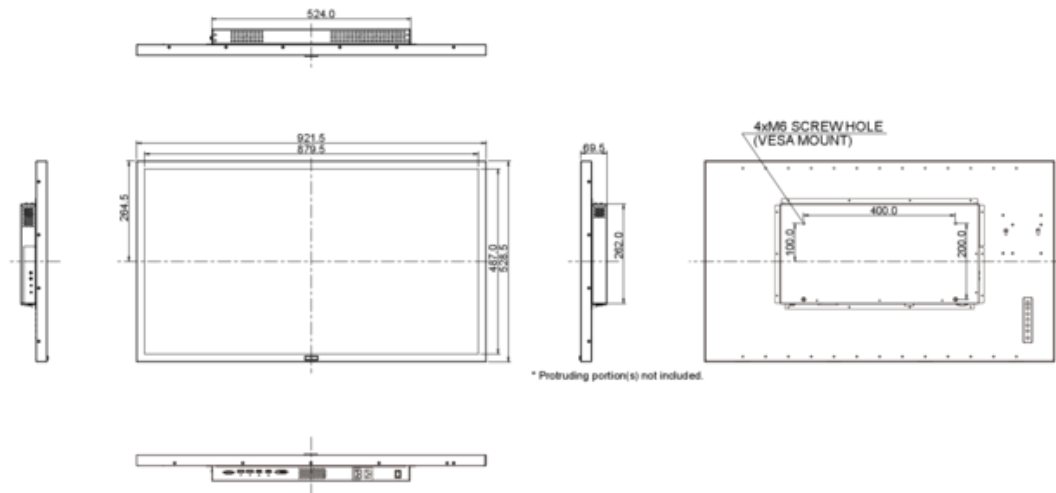

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION (). ALL RIGHTS RESERVED.

ProLite LH4264S-B1

ProLite LH4264S - a 42" Full HD professional large format display



Incorporating IPS panel technology the LH4264S guarantees great viewing from all angles, high brightness and exceptional colour clarity. It features an ambient light sensor delivering exceptional performance with the added benefit of saving on power. Features include PIP and PBP perfect for Video Conferencing or handing multi-input content in many environments. Landscape and Portrait friendly, the display can be mounted according to the application for true impact in Digital Signage.

DISPLAY CHARACTERISTICS

Diagonal	42"; 106.5 cm
Panel	IPS, LED-Backlit
Display area h x w	522 x 927.9 mm; 20.6" x 36.5"
Response time	9 ms
Static contrast	1 000 : 1 typical
Brightness	400 cd/m² typical
Viewing zone	horizontal/vertical: 178° / 178°; right/left: 89° / 89°; up/down: 89° / 89°
Display colour	16.7 million
Pixel pitch h x v	0.4833 x 0.4833 mm
Native resolution	Full HD 1080p, 1920 x 1080 (2.1 megapixel)
Horizontal sync	30 - 83 KHz
Vertical sync	50 - 76 Hz
Synchronization	Separate Sync
Aspect ratio	16 : 9
PIP (Picture in Picture)	PIP, PBP
Max. non-stop operating time	18 hours/day (IRFM on)

POWER MANAGEMENT

Power supply	AC 100 - 240 V, 50 / 60 Hz
Power Supply Unit	internal
Power usage	119 W typical; max. 0.5 W in Power management mode
Power management	VESA DPMS

EU ENERGY EFFICIENCY LABEL

Energy efficiency class	C
On Mode Power Consumption	100W
Annual Energy Consumption	146 kW/annum*
Visible Screen Diagonal	107 cm; 42"

This is information under Regulation (EU) No 1062/2010.

*Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.

DIMENSIONS / WEIGHT

Dimensions w x h x d	980.5 x 570 x 105 mm
Weight	18 kg

INTERFACES / CONNECTORS / CONTROLLERS

Analog input connector	VGA, RCA (VIDEO), S-Video, BNC jack, mini jack
Digital input connector	DVI-D, HDMI, DisplayPort
HDCP	yes
Audio-signal-input	mini jack, RCA L/R(2x)
Output connector	RS232C, RCA (L/R), VGA (D-Sub), BNC jack (VIDEO)
Inputs	RS232C, RCA (L/R), mini jack, BNC jack, S-Video, RJ45 (for LAN control)

SPECIAL FEATURES

Plug & Play	VESA DDC2BTM
Controls	On-Screen-Display in 7 languages (EN, FR, ES, NL, DE, PL, RU) controlled by back controls or a remote control
User controls	picture (picture mode, backlight, contrast, brightness, chroma, phase, sharpness, colour temp., noise reduction, film mode, rest), sound (sound mode, treble, bass, balance, surround, speaker, audio source, reset), screen (PAP setting, display wall, aspect, adjust screen, freeze), setting (language, schedule, power save, control setting, network settings, set monitor ID, HDMI control, advanced, information, reset all)
Speakers	2 x 12 W (Stereo)
Safety	CE, TÜV-Bauart, CB, CU
VESA mounting	400 x 200 mm
Colour	Black
Remote control	yes
Orientation	portrait/landscape

ACCESSORIES

Driver	Windows 95 / 98 / 2000 / ME / XP / Vista / 7 / 8
Included accessories	power cable, VGA signal cable, DVI-D signal cable, remote control, iiyama logo sticker, quick start guide, safety guide

ProLite LH4664S-B1

ProLite LH4664S - a 46" Full HD professional large format display



Incorporating AMVA3 panel technology the LH4664S guarantees great viewing from all angles, high brightness and perfect colour clarity. It features an ambient light sensor delivering exceptional performance with the added benefit of saving on power. Features include PIP and PBP perfect for Video Conferencing or handing multi-input content in many environments. Landscape and Portrait friendly, the display can be mounted according to the application for true impact in Digital Signage.

DISPLAY CHARACTERISTICS

Diagonal	46"; 116.8cm
Panel	AMVA3 LED
Display area h x w	572.67 x 1018.08 mm; 22.5" x 40.1"
Response time	6.5 ms
Static contrast	4 000 : 1 typical
Brightness	500 cd/m² typical
Viewing zone	horizontal/vertical: 178° / 178°; right/left: 89° / 89°; up/down: 89° / 89°
Display colour	16.7 million
Pixel pitch h x v	0.53025 x 0.53025 mm
Native resolution	Full HD 1080p, 1920 x 1080 (2.1 megapixel)
Horizontal sync	30 - 83 KHz
Vertical sync	50 - 76 Hz
Synchronization	Separate Sync
Aspect ratio	16 : 9
PIP (Picture in Picture)	PIP, PBP
Max. non-stop operating time	18 hours/day (IRFM on)

POWER MANAGEMENT

Power supply	AC 100 - 240 V, 50 / 60 Hz
Power Supply Unit	internal
Power usage	132 W typical; max. 0.5 W in Power management mode
Power management	VESA DPMS

EU ENERGY EFFICIENCY LABEL

Energy efficiency class	B
On Mode Power Consumption	94.3W
Annual Energy Consumption	138 kW/annum*
Visible Screen Diagonal	117 cm; 46"

This is information under Regulation (EU) No 1062/2010.

*Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.

DIMENSIONS / WEIGHT

Dimensions w x h x d	1051 x 605.5 x 84 mm
Weight	22 kg

INTERFACES / CONNECTORS / CONTROLLERS

Analog input connector	VGA (D-Sub), RCA (VIDEO), S-Video, BNC jack, mini jack
Digital input connector	DVI-D, HDMI, DisplayPort
HDCP	yes
Audio-signal-input	mini jack, RCA L/R(2x)
Output connector	RS232C, RCA (L/R), VGA (D-Sub), BNC jack (VIDEO)
Inputs	RS232C, RCA (L/R), mini jack, BNC jack, S-Video, RJ45 (for LAN control)

SPECIAL FEATURES

Plug & Play	VESA DDC2BTM
Controls	On-Screen-Display in 7 languages (EN, FR, ES, NL, DE, PL, RU) controlled by back controls or a remote control
User controls	picture (picture mode, backlight, contrast, brightness, chroma, phase, sharpness, colour temp., noise reduction, film mode, rest), sound (sound mode, treble, bass, balance, surround, speaker, audio source, reset), screen (PAP setting, display wall, aspect, adjust screen, freeze), setting (language, schedule, power save, control setting, network settings, set monitor ID, HDMI control, advanced, information, reset all)
Speakers	2 x 12 W (Stereo)
Safety	CE, TÜV-Bauart, CB, GOST-R
VESA mounting	400 x 200 mm
Colour	Black
Remote control	yes
Orientation	portrait/landscape

ACCESSORIES

Driver	Windows 95 / 98 / 2000 / ME / XP / Vista / 7 / 8
Included accessories	power cable, VGA (D-Sub) signal cable, DVI-D signal cable, remote control, iiyama logo sticker, quick start guide, safety guide

ProLite LH4780SB-B1

47" large format display, 24/7 operation and high brightness

Incorporating IPS panel technology the LH4780SB guarantees great viewing from all angles and perfect colour clarity. The higher brightness ensures crispy and clear image, resulting in outstanding information transmission performance, even in bright environment. Features include PIP and PBP perfect for Video Conferencing or handling multi-input content. Build in expansion slot supports the Open Pluggable Specification (OPS) standard; it simplifies the installation of a plug-in PC for digital signage applications. Landscape and Portrait friendly, ProLite LH4780SB is designed for a continues operation. Perfect for true impact in Digital Signage.

DISPLAY CHARACTERISTICS

Diagonal	47"; 119.3cm
Panel	IPS LED
Display area h x w	584.8 x 1039.7 mm; 23" x 40.9"
Response time	12 ms
Static contrast	1 300 : 1 typical
Brightness	700 cd/m² typical
Viewing zone	horizontal/vertical: 178° / 178°; right/left: 89° / 89°; up/down: 89° / 89°
Pixel pitch h x v	0.542 x 0.542 mm
Native resolution	Full HD 1080p, 1920 x 1080 (2.1 megapixel)
Horizontal sync	31.5 - 91.1 KHz
Vertical sync	50 - 85 Hz
Synchronization	Separate Sync
Aspect ratio	16 : 9
Display colours	1.06 billion
PIP (Picture in Picture)	PIP, PBP
Max. non-stop operating time	24 hours/day (Screen Saver - Motion mode set on)

POWER MANAGEMENT

Power supply	AC 100 - 240 V, 50 / 60 Hz
Power Supply Unit	internal
Power usage	140 W typical; max. 0.8 W in Power management mode
Power management	VESA DPMS, ENERGY STAR®

EU ENERGY EFFICIENCY LABEL

Energy efficiency class	B
On Mode Power Consumption	85.4W
Annual Energy Consumption	125 kW/annum*
Visible Screen Diagonal	119 cm; 47"

This is information under Regulation (EU) No 1062/2010.

*Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.

DIMENSIONS / WEIGHT

Dimensions w x h x d	1080 x 624.5 x 46.5 mm
Weight	17 kg

INTERFACES / CONNECTORS / CONTROLLERS

Analog input connector	VGA (D-Sub), S-Video, BNC jack, mini jack
Digital input connector	DVI-D, 2 x HDMI, DisplayPort
HDCP	yes
Audio-signal-input	mini jack
Output connector	RS232C, VGA (D-Sub), BNC jack (VIDEO)
Expansion solution	OPS slot
Inputs	RS232C, mini jack, BNC jack, S-Video, RJ45 (for LAN control)

SPECIAL FEATURES

Plug & Play	VESA DDC2B™
Controls	On-Screen-Display in 6 languages (EN, FR, NL, DE, PL, RU) controlled by back controls or a remote control
User controls	picture (brightness, contrast, sharpness, black level, noise reduction, tint, colour, colour temperature, colour control, gamma, auto brightness, picture reset), screen (H. position, V. position, clock, phase, zoom mode, custom zoom, H. resolution, V. resolution, screen reset), audio (balance, treble, bass, speaker, audio reset), PIP (PIP mode, PIP size, PIP audio, PIP H. position, PIP V. position, sub input, PIP reset), configuration 1(auto setup, auto adjust, power save, language, screen saver, colour system, side border colour, configuration reset, factory reset), configuration 2(serial control, LAN setting, controller setting, control time out, monitor ID, OSD turn off, OSD H. position, OSD V. position, OSD rotation, information OSD, off timer, schedule, date and time, monitor information), advanced option (input resolution, black level expansion, input change, input detect, scan mode, scan conversion, film mode, smooth motion mode, IR control, tiling, hat status, power on delay, terminal setting, closed caption, USB upstream
Speakers	2 x 10 W (Stereo)
Safety	CB, CE, EAC, TÜV-Bauart
VESA mounting	400 x 400 mm
Colour	Black
Remote control	yes
Orientation	portrait/landscape/face up

ACCESSORIES

Driver	Windows XP / Vista / 7 / 8
Included accessories	power cable, VGA (D-Sub) signal cable, DVI-D signal cable, remote control, iiyama logo sticker, quick start guide, safety guide

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.



ProLite LH5580S-B1

55" large format display with 24/7 operation and OPS slot

Incorporating AMVA3 panel technology the LH5580S guarantees great viewing from all angles and perfect colour clarity. Features include PIP and PBP perfect for Video Conferencing or handling multi-input content. Build in expansion slot supports the Open Pluggable Specification (OPS) standard; it simplifies the installation of a plug-in PC for digital signage applications. Landscape and Portrait friendly, ProLite LH5580S is designed for a continues operation. Perfect for true impact in Digital Signage.

DISPLAY CHARACTERISTICS

Diagonal	55"; 138.8cm
Panel	AMVA3 LED
Display area h x w	680.4 x 1209.6 mm; 26.8" x 47.6"
Response time	6.5 ms
Static contrast	4 000 : 1 typical
Brightness	450 cd/m² typical
Viewing zone	horizontal/vertical: 178° / 178°; right/left: 89° / 89°; up/down: 89° / 89°
Pixel pitch h x v	0.630 0.630 x mm
Native resolution	Full HD 1080p, 1920 x 1080 (2.1 megapixel)
Horizontal sync	31.5 - 91.1 KHz
Vertical sync	50 - 85 Hz
Synchronization	Separate Sync
Aspect ratio	16 : 9
Display colours	1.06 billion
PIP (Picture in Picture)	PIP, PBP
Max. non-stop operating time	24 hours/day (Screen Saver - Motion mode set on)

POWER MANAGEMENT

Power supply	AC 100 - 240 V, 50 / 60 Hz
Power Supply Unit	internal
Power usage	133 W typical; max. 1 W in Power management mode
Power management	VESA DPMS, ENERGY STAR®

EU ENERGY EFFICIENCY LABEL

Energy efficiency class	A
On Mode Power Consumption	102.6W
Annual Energy Consumption	150 kW/annum*
Visible Screen Diagonal	139 cm; 55"

This is information under Regulation (EU) No 1062/2010.

*Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.

DIMENSIONS / WEIGHT

Dimensions w x h x d	1247 x 718 x 66.5 mm
Weight	28.5 kg

INTERFACES / CONNECTORS / CONTROLLERS

Analog input connector	VGA, S-Video, BNC jack, mini jack
Digital input connector	DVI-D, 2 x HDMI, DisplayPort
HDCP	yes
Audio-signal-input	mini jack
Output connector	RS232C, VGA (D-Sub), BNC jack (VIDEO)
Expansion solution	OPS slot
Inputs	RS232C, mini jack, BNC jack, S-Video, RJ45 (for LAN control)

SPECIAL FEATURES

Plug & Play	VESA DDC2B™
Controls	On-Screen-Display in 6 languages (EN, FR, NL, DE, PL, RU) controlled by back controls or a remote control
User controls	picture (brightness, contrast, sharpness, black level, noise reduction, tint, colour, colour temperature, colour control, gamma, auto brightness, picture reset), screen (H. position, V. position, clock, phase, zoom mode, custom zoom, H. resolution, V. resolution, screen reset), audio (balance, treble, bass, speaker, audio reset), PIP (PIP mode, PIP size, PIP audio, PIP H. position, PIP V. position, sub input, PIP reset), configuration 1(auto setup, auto adjust, power save, language, screen saver, colour system, side border colour, configuration reset, factory reset), configuration 2 (serial control, LAN setting, controller setting, control time out, monitor ID, OSD turn off, OSD H. position, OSD V. position, OSD rotation, information OSD, off timer, schedule, date and time, monitor information), advanced option (input resolution, black level expansion, input change, input detect, scan mode, scan conversion, film mode, IR control, tiling, heat status, power on delay, terminal setting, closed caption, USB upstream
Speakers	2 x 10 W (Stereo)
Safety	CB, CE, EAC, TÜV-Bauart
VESA mounting	400 x 400 mm
Colour	Black
Remote control	yes
Orientation	portrait/landscape/face up

ACCESSORIES

Driver	Windows XP / Vista / 7 / 8
Included accessories	power cable, VGA signal cable, DVI-D signal cable, remote control, iiyama logo sticker, quick start guide, safety guide